
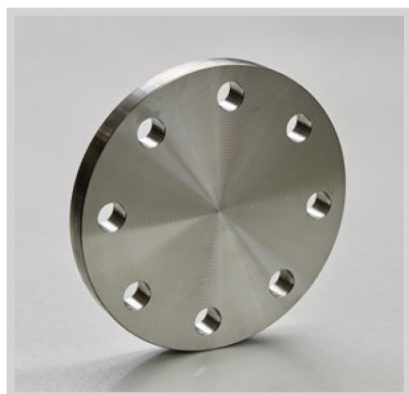


Flange cieche

EN 1092-1/05 TIPO A

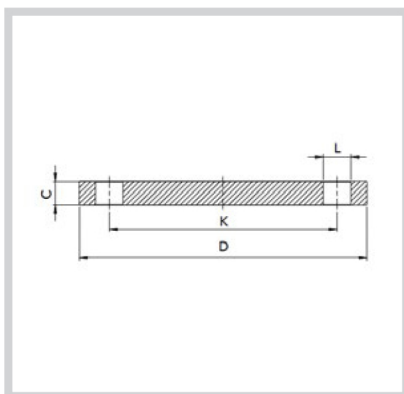

DN	PN	D	K	Fori		C
				nr	L	
15	40	95	65	4	14	16
20	40	105	75	4	14	18
25	40	115	85	4	14	18
32	40	140	100	4	18	18
40	40	150	110	4	18	18
50	40	165	125	4	18	20
65	40	185	145	8	18	22
80	40	200	160	8	18	24
100	40	235	190	8	22	24
125	40	270	220	8	26	26
150	40	300	250	8	26	28
200	40	375	320	12	30	36
250	40	450	385	12	33	38
300	40	515	450	16	33	42
200	25	360	310	12	26	30
250	25	425	370	12	30	32
300	25	485	430	16	30	34
50	16	165	125	4	18	18
65	16	185	145	4	18	18
				8		
80	16	200	160	4	18	20
				8		
100	16	220	180	8	18	20
125	16	250	210	8	18	22
150	16	285	240	8	22	22
200	16	340	295	12	22	24
250	16	405	355	12	26	26
300	16	460	410	12	26	28
350	16	520	470	16	26	30
400	16	580	525	16	30	32
450	16	640	585	20	30	40
500	16	715	650	20	33	44
600	16	840	770	20	36	54
700	16	910	840	24	36	58
800	16	1025	950	24	39	62
200	10	340	295	8	22	24
250	10	395	350	12	22	26
300	10	445	400	12	22	26
350	10	505	460	16	22	26
400	10	565	515	16	26	26
450	10	615	565	20	26	28
500	10	670	620	20	26	28
600	10	780	725	20	30	34
700	10	895	840	24	30	38
800	10	1015	950	24	33	48
15	6	80	55	4	11	12
20	6	90	65	4	11	14
25	6	100	75	4	11	14
32	6	120	90	4	14	14
40	6	130	100	4	14	14
50	6	140	110	4	14	14
65	6	160	130	4	14	14
80	6	190	150	4	18	16
100	6	210	170	4	18	16
125	6	240	200	8	18	18
150	6	265	225	8	18	18
200	6	320	280	8	18	20
250	6	375	335	12	18	22
300	6	440	395	12	22	22
350	6	490	445	12	22	22
350	6	490	445	12	22	22
400	6	540	495	16	22	22
450	6	595	550	16	22	24
500	6	645	600	20	22	24
600	6	755	705	20	26	30
700	6	860	810	24	26	40
800	6	975	920	24	30	44